

ROCK-SOLID RELIABILITY

# BigTow<sup>®</sup> TRAILERS



## Description:

The Big Tow<sup>®</sup> deck-over tilt trailers offer convenience and durability. There are no ramps to hassle with, simply tilt the deck, drive on or off and level the deck back down. It features our patented automatic kick-out ramp that doubles as an under-ride protection bumper. The tilt deck trailer features a single-lever twin-latch system, stationary forward deck, Hutchens<sup>®</sup> suspension and adjustable hitch. A deck cushion cylinder eases the deck back into transport position and prevents equipment from slamming the deck down.

## Quick Specs:

- 36" deck height (empty)
- 8'-6" deck width
- Tilt deck cushion cylinder
- Air brakes
- Hutchens<sup>®</sup> suspension
- Auto kick-out ramp/under-ride protection
- Single-lever twin-latch locking system
- LED lights and sealed wiring



Patented automatic kick-out ramp doubles as under-ride protection.




Cushion cylinder controls the deck from slamming when loading or unloading equipment.



Standard 4-foot stationary deck gives room for longer equipment and makes towing easier.

Go directly to our web site with your Smart Phone. Scan this tag with your phone's camera using the app at <http://gettag.mobi>



Photos may show optional equipment.

[bigtow.com](http://bigtow.com)

U.S.A. BUILT  
EMPLOYEE OWNED




GALVANIZING  
AVAILABLE

Deck-Over Tilt  
B-20T

# B-20T

# ROCK-SOLID RELIABILITY

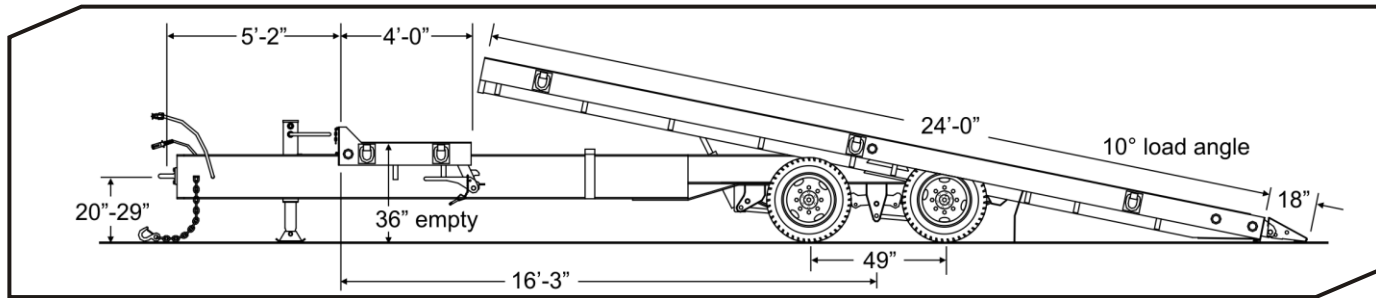

## SPECIFICATIONS

S=Standard O=Optional

B-20T

| CAPACITY / DIMENSIONS                                 |                     |  |  |  |
|---|---------------------|--|--|--|
| Payload Rating (lbs/kg)                               | 40,000 / 18,144     |  |  |  |
| GVWR (lbs/kg)   | 50,500 / 22,906     |  |  |  |
| GAWR (lbs/kg)   | 36,320 / 16,474     |  |  |  |
| Approx. Avg. Weight (lbs/kg)                          | 10,500 / 4763       |  |  |  |
| Overall Length (ft-in/mm)                             | 34-8 / 10,566       |  |  |  |
| Deck Height (empty)(in/mm)                            | 36 / 914            |  |  |  |
| Overall Width (ft-in/mm)                              | 8-6 / 2591          |  |  |  |
| TONGUE  |                     |  |  |  |
| Tongue Length 5'-2" (1575mm)                          | S                   |  |  |  |
| Storage Tray with Lid                                 | S                   |  |  |  |
| Pintle Ring (in)                                      | 3                   |  |  |  |
| High-Tensile Safety Chain                             | 1/2" Grade 80       |  |  |  |
| Bolt-on Two-Speed Parking Jack                        | 25K                 |  |  |  |
| FRAME / RAMPS   |                     |  |  |  |
| Main Beam   | W16x26, Gr.50       |  |  |  |
| One-Piece Cold-Formed Frame Rails                     | S                   |  |  |  |
| Side Rails (in x in x in)                             | 8x2x1/4 Tubing      |  |  |  |
| Crossmembers  | 3" Jr I-beam        |  |  |  |
| Headboard Height (in/mm)                              | 5.5 / 140           |  |  |  |
| Deck Length (ft/mm)                                   | 24+4 / 7315+1219    |  |  |  |
| Deck Material   | 2" nom. White Oak   |  |  |  |
| Deck Cushion Cylinder                                 | S                   |  |  |  |
| Deck Latch  | Dual-Point          |  |  |  |
| Approach Ramp (in x in/mm)                            | 18 / 457            |  |  |  |
| Load Angle (degrees) – depending on deck length       | 10                  |  |  |  |
| D-Ring Tie Downs (Total/Side)                         | 10 / 5              |  |  |  |
| SUSPENSION / TIRES                                    |                     |  |  |  |
| Adjustable Hutch 9700 Spring Suspension               | S                   |  |  |  |
| No. of Axles  | 2                   |  |  |  |
| Axle Capacity (each) (lbs/kg)                         | 22,500 / 10,206     |  |  |  |
| Axle Spread (in/mm)                                   | 49 / 1245           |  |  |  |
| Hubs  | Oil Bath            |  |  |  |
| Brake Size (in/mm)                                    | 12.25x7.5 / 311x191 |  |  |  |
| Air Brakes (Full ABS Modulated, Park Brake All Axles) | S                   |  |  |  |
| Hub Piloted Budd Wheels (in/mm)                       | 17.5x6.75 / 445x171 |  |  |  |
| Wheel Bolt Pattern                                    | 8-bolt              |  |  |  |
| Tires / Load Range Rating                             | 215/75R x 17.5 / H  |  |  |  |

## STANDARD EQUIPMENT


- Adjustable hitch height
- 7-pole round electrical plug
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- Trailer color: Equipment Charcoal

## OPTIONAL EQUIPMENT

Other options may be available  
See your dealer or visit our web site for details

- Rigid Gooseneck
- Dual parking jacks
- Additional stationary deck length
- Additional tie-downs
- Spare tire and wheel mount
- Spare tire and wheel
- Tire upgrade (235/75R17.5)
- Color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Black
- Galvanizing

Download these PDF specs to your Smart Phone. Scan this tag with your phone's camera using the app at <http://gettag.mobi>



\*Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.