

ROCK-SOLID RELIABILITY

BigTOW[®] TRAILERS



Description:

The B-2DT trailer is a pan type tilt deck and is designed for hauling small equipment and short loads of sand, rock or debris. The deck features a slip-resistant texture and 8-inch high sides. The low deck height is perfect for a low load angle and the slip-resistant deck assists in equipment loading. The B-2DT features a rubber-ride axle for a smooth ride, electric brakes, an adjustable hitch, and a positive locking (over-center) latch system to keep the deck secured to the frame.

Quick Specs:

- Steel pan deck
- 14" deck height (empty)
- 54" between fenders
- 10' deck
- Electric brakes
- Dexter[®] Torflex[®] axle
- E-Z Lube hubs
- LED Lights and Sealed Wiring



Positive locking (over-center) latch system keeps deck secured to the frame.




Grocket mounted LED lights are standard.



Sealed battery break-away system charges while plugged into the tow vehicle and can be checked at the press of a button.

Go directly to our web site with your Smart Phone. Scan this tag with your phone's camera using the app at <http://gettag.mobi>



Photos may show optional equipment.

bigtow.com

U.S.A. BUILT
EMPLOYEE OWNED




GALVANIZING
AVAILABLE

Drop-Deck Tilt
B-2DT

B-2DT

ROCK-SOLID RELIABILITY

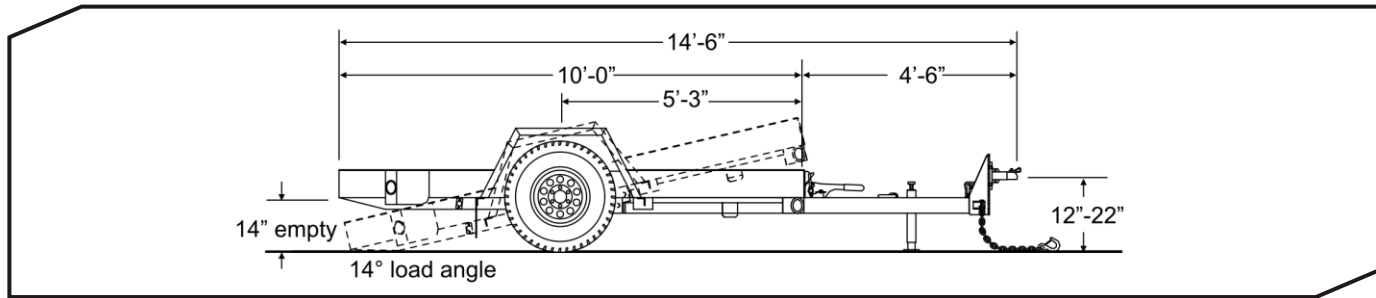

STANDARD EQUIPMENT

- Adjustable hitch height
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- RV electrical plug
- Trailer color: Equipment Charcoal

OPTIONAL EQUIPMENT

Other options may be available
See your dealer or visit our web site for details

- Hydraulic surge brakes
- 6-pole round electrical plug
- Oak wood deck
- Deck cushion cylinder
- Rubber runner pads
- Additional tie-downs
- Spare tire and wheel
- Color options: Construction Yellow, Equipment Red, Equipment Blue, Equipment Black
- Galvanizing

SPECIFICATIONS

S=Standard O=Optional

B-2DT

CAPACITY / DIMENSIONS

Payload Rating (lbs/kg)	3,500 / 1588			
GVWR (lbs/kg)	4,600 / 2086			
GAWR (lbs/kg)	3,500 / 1588			
Approx. Avg. Weight (lbs/kg)	1,100 / 499			
Overall Length (ft-in/mm)	14-6 / 4419			
Deck Height (empty)(in/mm)	14 / 355			
Overall Width (in/mm)	80 / 2032			
Load Width (in/mm)	54 / 1372			

TONGUE

Tongue Length 4'-6" (1372mm)	S			
Pintle Ring (in)	2.5			
Safety Chain	3/8" Grade 43			
Bolt-on Drop-Leg Parking Jack	5K			


FRAME / RAMPS

Main Beam	4 x 2 Tubing			
Crossmembers	3" Jr I-beam			
Headboard Height (in / mm)	8 / 204			
Deck	Steel Pan			
Deck Lip (in / mm)	8 / 204			
Deck Latch	Single Point			
Load Angle (degrees) – depending on deck length	14			
Tie Downs	D-ring			
Number of Tie-Downs (Total / Side)	6 / 3			

SUSPENSION / TIRES

Rubber-Ride Axle w/Warranty	S			
Axle Capacity (each) (lbs/kg)	3,500 / 1588			
Axle Spread (in/mm)	N/A			
Hubs	E-Z Lube			
Electric Brakes w/Forward Adjust	S			
Brake Size (in/mm)	10x2.25 / 250x57			
Battery Break-Away Kit with Tow Charger	S			
Wheels (in/mm)	15x6 / 381x152			
Wheel Bolt Pattern	6-bolt			
Tires / Load Range Rating	225/75R x 15 / D			

Download these PDF specs to your Smart Phone. Scan this tag with your phone's camera using the app at <http://gettag.mobi>



www.bigtow.com
866-397-8481

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

©Big Tow Trailers 10/2010

*Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.