

BigTow[®] TRAILERS

ROCK-SOLID RELIABILITY

Hydraulic Tail
B-35HT / B-55HT



12K hydraulic winch with cable is standard. It is positioned at the front of the 10-foot upper deck of the HT trailer.



Hydraulic tail creates a low load angle and easy approach. Rear tail section folds under when in transport position.



Easily haul several types of equipment with the HT trailer by Towmaster.

Description:

The B-35HT and B-55HT trailers by Big Tow[®] are designed for the rental and construction industries. They feature a perimeter frame design, a fifth-wheel gooseneck with top deck, hydraulic folding tail, and 12,000 lb. winch. LED lights, Angelim Pedra wood deck, hi-tensile fabricated steel beam frame, dual parking jacks, and driver side controls are also standard. Several configurations and options are available.

Quick Specs:

- 39" deck height (empty)
- 8'-6" deck width
- 43' to 48' overall length
- 10'-0" top deck
- Air ride suspension and air brakes
- Dump valve and pressure gauge
- 12K hydraulic winch/cable
- Hydraulic fold-under tail
- LED lights and sealed wiring



GALVANIZING
AVAILABLE




Photos may show optional equipment.

U.S.A. BUILT

866-397-8481

bigtow.com

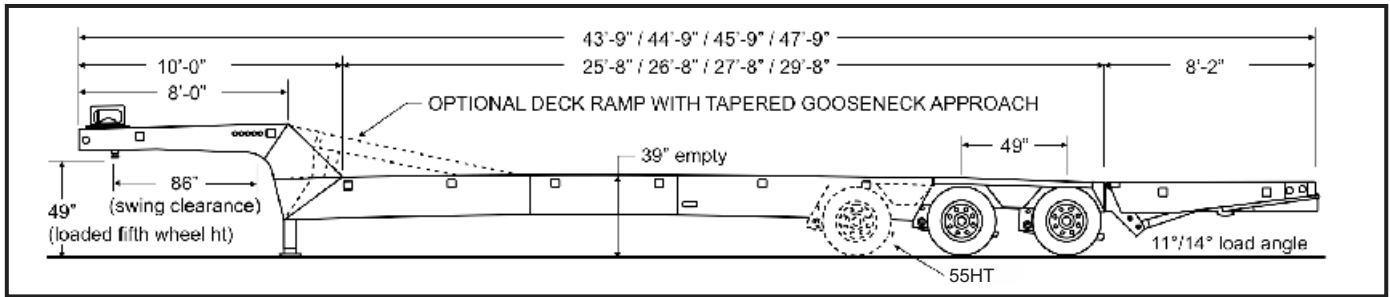

SPECIFICATIONS

S=Standard O=Optional

CAPACITY / DIMENSIONS	B-35HT	B-55HT		
Capacity Rating (lbs/kg)	70,000 / 31,751	110,000 / 49,895		
GVWR (lbs/kg)	87,800 / 39,825	132,800 / 60,237		
GAWR (lbs/kg)	45,400 / 20,593	68,100 / 30,890		
Approx. Weight (lbs/kg)	17,800 / 8074	22,800 / 10,342		
Overall Length (ft-in/mm)	See drawing	See drawing		
Deck Height (empty)(in/mm)	39 / 991	39 / 991		
Deck Length (ft-in/mm)	See drawing	See drawing		
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591		
GOOSENECK				
Gooseneck Type	Tapered	Tapered		
Top Deck Length (ft-in/mm)	10-0 / 3048	10-0 / 3048		
Swing Clearance (in/mm)	86 / 2184	86 / 2184		
Truck Height (in/mm)	49 / 1245	49 / 1245		
(2) Bolt-on Telescoping Parking Jacks	25K	25K		
12K Hydraulic Winch with cable	S	S		
FRAME / RAMPS				
Main Beam	Mfg. Cambered	Mfg. Cambered		
Crossmembers	8" I-beam	8" I-beam		
Crossmember Spacing (in/mm)	12 / 305	12 / 305		
Deck Material	Nom 2" Angelim Pedra	Nom 2" Angelim Pedra		
6' Hyd. Deck Ramp w/Tapered Gooseneck Approach	O	O		
8' Hyd. Deck Ramp w/Tapered Gooseneck Approach	O	O		
Tie Downs (4'-0" centers) (total/Side)	Stake Pockets	Stake Pockets		
Hyd. Tail (ft-in x in/mm)	12-0" / 3658	12-0" / 3658		
SUSPENSION / TIRES				
Suspension	Air	Air		
No. of Axles	2	3		
Axle Capacity (each) (lbs/kg)	22,500 / 10,206	22,500 / 10,206		
Axle Spread (in/mm)	49 / 1245	49 / 1245		
Hubs	Oil Bath	Oil Bath		
Brake Size (in/mm)	12.25x7.5 / 311x191	12.25x7.5 / 311x191		
Air Brakes (Full ABS Modulated, Park Brake All Axles)	S	S		
Hub Piloted Budd-type Wheels (in/mm)	17.5x6.75 / 445x171	17.5x6.75 / 445x171		
Wheel Bolt Pattern	8-bolt	8-bolt		
Tires / Load Range Rating	235/75R17.5 / H	235/7517.5 / H		

STANDARD EQUIPMENT

- S.A.E. King Pin
- 7-pole round electrical plug
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- Trailer color: Black

OPTIONAL EQUIPMENT

Other options may be available. Ask your dealer or visit our web site.

- Deck ramp with tapered gooseneck
- 20K winch
- Remote control
- Self-contained hydraulic unit
- Dual hydraulic controls
- 2-speed 25K parking jacks
- Additional deck length
- Several deck traction options
- Several tie-down options
- Aluminum wheel options
- Spare tire and wheel mount
- Spare tire and wheel
- Light options
- Color options: Construction Yellow, Equipment Red, Blue, Charcoal

ROCK-SOLID RELIABILITY

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.

Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.

www.bigtow.com

866-397-8481

©Big Tow 06/2015