



Easy operation.



Air actuators located under beavertail.



Ramp control levers through tailboard.

Description:

Air ramps are controlled by an on-board air tank. Releasing air lowers the ramps and filling the actuators raises the ramps. This is an economical way to add automatic ramp lifts to your trailer. Air ramps are 6 ft. long with a 16-degree incline. This option may be added to deck-over trailers with a capacity of 20,000 lbs. or more, equipped with air brakes.

Quick Specs:

- 5-ft. 12° beavertail
- 6-ft. 16° hydraulic ramps
- Hydraulic operated

Available on: • B-10 • B-10LP • B-20 • B-20LP • B-25RG
• B-12 • B-12LP • B-25 • B-25LP • B-35RG

Air-brake trailers only!


22 ft. min. flat deck length required.



**GALVANIZING
AVAILABLE**



Photos may show optional equipment.

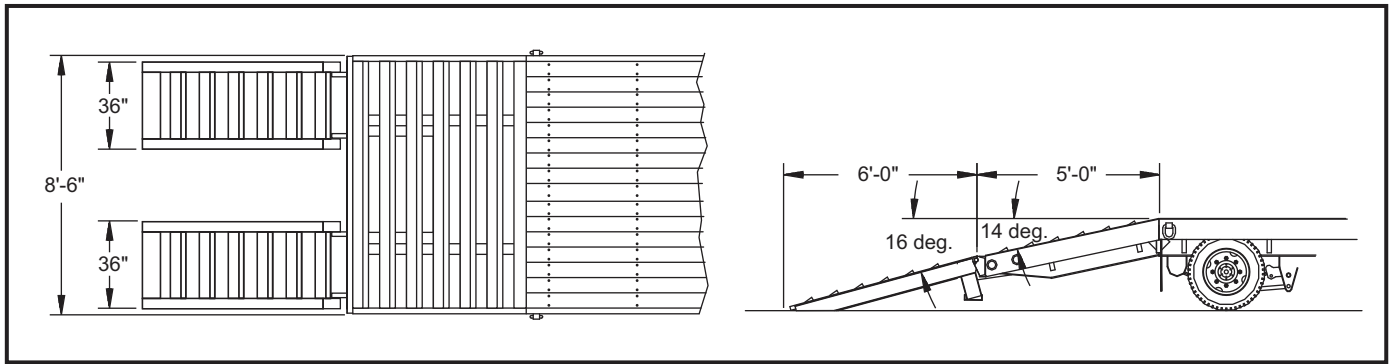

AVAILABLE ON: • B-10 • B-10LP • B-20 • B-20LP • B-25RG
• B-12 • B-12LP • B-25 • B-25LP • B-35RG

Air-brake trailers only!

22 ft. min. flat deck length required.

STANDARD EQUIPMENT

- 5-ft. 14° beavertail
- 6-ft. 16° hydraulic ramps
- Air actualted
- Choice of steel cleat or wood

ROCK-SOLID RELIABILITY

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.

Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.