



Solid-bar ramp holdups.



Easy to operate controls.



Wood-topped or steel cleat.

Description:

Hydraulic ramps are controlled by an on-board electric over hydraulic pump. They are standard with a 5-ft. beavertail at 12-degrees and 3 ft. wide x 6 ft. long hydraulic ramps at 16-degree incline. This option may be added to almost any deck-over trailer with a capacity of 20,000 lbs. or more.

Quick Specs:

- 5-ft. 12° beavertail
- 6-ft. 16° hydraulic ramps
- Electric over hydraulic operated

- Available on:
- B-10
 - B-10LP
 - B-20
 - B-20LP
 - B-25RG
 - B-12
 - B-12LP
 - B-25
 - B-25LP
 - B-35RG
 - B-15


22 ft. min. flat deck length required.



**GALVANIZING
AVAILABLE**



Photos may show optional equipment.

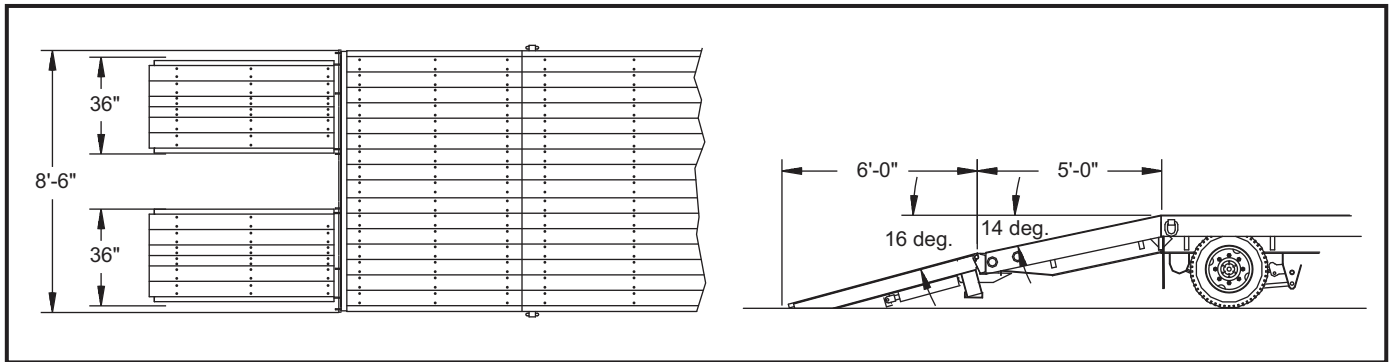

- AVAILABLE ON:**
- B-10
 - B-10LP
 - B-20
 - B-20LP
 - B-25RG
 - B-12
 - B-12LP
 - B-25
 - B-25LP
 - B-35RG
 - B-15

22 ft. min. flat deck length required.

STANDARD EQUIPMENT

- 5-ft. 12° beavertail
- 6-ft. 16° hydraulic ramps
- Electric over hydraulic operated pump
- Choice of steel cleat or wood

ROCK-SOLID RELIABILITY

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.
Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.